



Processor

Up to Intel® Core™ 2 Duo E6550 (2.60GHz, 4MB L2 cache, 1066MHz FSB)

Operating System

Genuine Windows® XP Professional
Genuine Windows® XP Home Edition
Genuine Windows Vista® Home Basic
Genuine Windows Vista® Home Premium
Genuine Windows Vista® Business
Genuine Windows Vista® Ultimate

Graphics

Up to 256MB ATI Radeon® 2400 XT

Memory

Up to 4GB¹² Dual-Channel DDR2³³
SDRAM⁴ (667MHz)

Storage

Up to 2 hard drives and 640 GB⁵ of data

Ports



- 1 VGA standard, 1 DVI and 1 S-Video with standard PCI-Express video card
- USB: 8 USB Ports (2 front, 4 back, 2 internal)
- Audio line-in/out, mic, rear/side surround, two front for headphones/mic
- Integrated 10/100 LAN (RJ45) - 56k PCI Data Fax Modem (optional)

Dimensions

362 mm x 100 mm x 435 mm (14.2" x 3.9" x 17.1")

Chipset

Intel® G33 Express Chipset

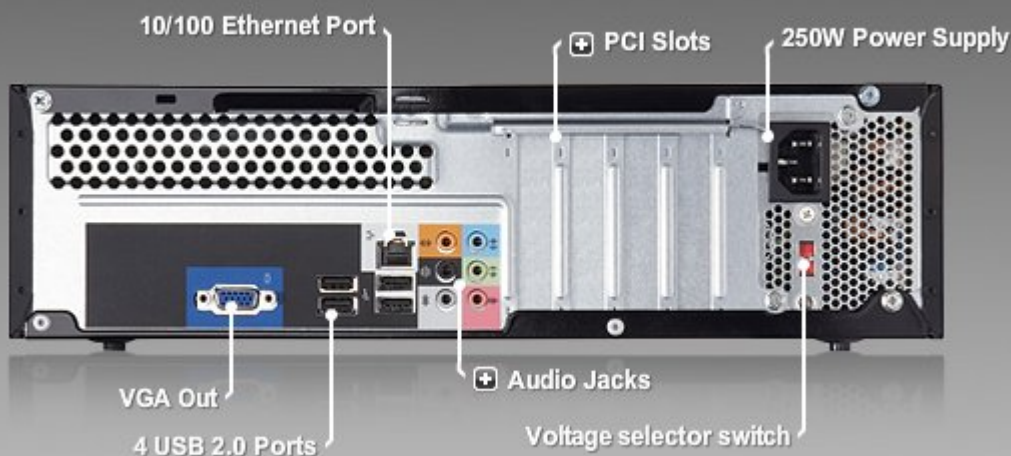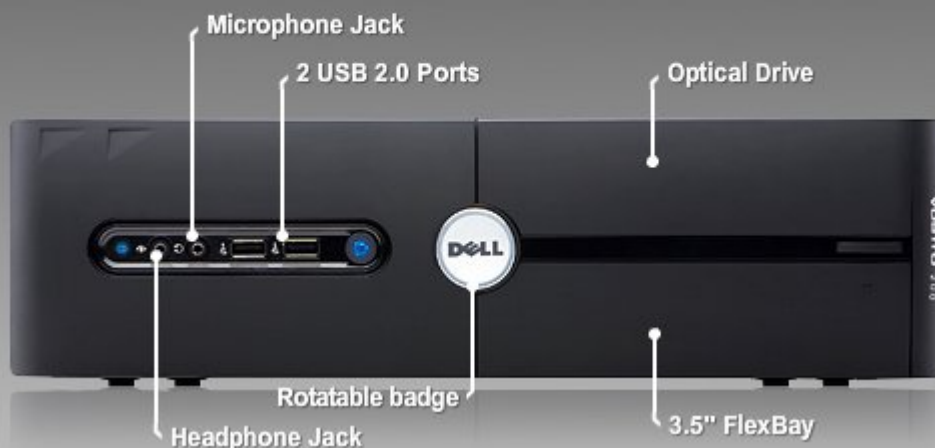



Classic USB Keyboard

Device Type
Keyboard

Form Factor
External

Width
17.5 in

Depth
6.6 in

Height
0.9 in

Color
Glossy black

Localization
English - North America

Connectivity Technology
Wired

Interface
USB

Features
Spillproof, Zero-Degree Tilt

Connections
1 x USB - 4 pin USB Type A

Cables Included
1 x USB cable

OS Required
Microsoft Windows 98, Microsoft Windows 2000, Microsoft Windows Millennium Edition, Apple MacOS X, Microsoft Windows XP, Microsoft Windows Vista

Service & Support
3 years warranty

Service & Support Details
Limited warranty - 3 years



SBF-96 USB Optical Wheel Mouse

Device Type
Mouse

Form Factor
External

Width
2.2 in

Depth
4.5 in

Height
1.5 in

Color
Midnight black

Connectivity Technology
Wired

Interface
USB

Movement Detection Technology
Optical

Buttons Qty
3

Movement Resolution
400 dpi

Features
Scrolling wheel

Interfaces
1 x USB - 4 pin USB Type A

Cables Included
1 x mouse cable - 6 ft

Compliant Standards
CE, UL, FCC



Cash Drawers

Unparalleled Reliability and Value

Logic Controls cash drawers offer unparalleled reliability and value, with failure rates one-fifth that of other leading cash drawer vendors according to industry sources. Best of all, these high quality cash drawers are available at prices that drive superior value.

Compact, Efficient and Secure

The CR3000 series of standard duty cash drawers is compact in size, enabling retailers to utilize scarce counter or shelf space for more important functions. The units make very efficient use of internal space, however, with the till being almost the same size as those found in larger drawers. The CR3000 series also comes with important security features: all metal construction, no exposed screws, and three position locks.

Works with Any System

Logic Controls cash drawers work with all major brands of POS printers and offers a wide selection of interfaces. CR3000 Series' interfaces include printer driven, serial, USB, programmable parallel or serial, pass-through, and OPOS. The CR3001, in fact, is a 4-in-1 multi-interface cash drawer with an I/O port expansion hub. The serial and USB cash drawers are port-powered, while CR3001 units come with either 120V or 220V power adapters.

- Supports all major POS printers
- Wide selection of interfaces: printer-driven, RS232C, USB, programmable parallel or serial, pass-through, and OPOS
- Port-powered drawers available with serial or USB interface. No power adapter required
- High security design with all metal construction and no external screws
- Three position lock for maximum cash security
- Small form factor without sacrificing till size
- Adjustable bill and coin compartments
- Media slot for checks and large bills
- 4-in-1 multi-interface cash drawer with I/O port expansion hub
- Available in beige and dark gray, 120V and 220V

CR3000 SERIES COMPACT CASH DRAWER SPECIFICATIONS

MECHANICAL

Weight	14.3 lbs
Dimension (in inches)	
Height x Width x Depth	3.3" x 15.7" x 16.1"
Bill and Coin Tray	Adjustable slots

ELECTRICAL

CR3000 (Control signal from POS printer)	
Pulse amplitude	12 to 24 volts DC
Pulse width	100 to 200 milliseconds
Pulse duty cycle	10% max.
CR3001	
Power adapter input	120VAC; 220VAC optional
Power adapter output	12VAC
Power adapter current	1000mA
CR3002	
Pulse amplitude	12 volts
Pulse width	50u sec - 6.7m sec
Pulse duty cycle	20% min
CR3003	
Pulse amplitude	12 volts
Power Consumption	< 100mA

INTERFACE

CR3000 (Printer Driven)	Connects to POS printer drive circuit via supplied cable
CR3001 (4-in-1 smart interface)	
Serial input	
Data format	RS232C
Protocol	
Baud Rate	150, 300, 600, 1200, 2400, 4800, 9600*, 19200
Parity	None*, Odd, Even
Data Bits	7, 8*
Parallel input	
Data format	Centronics interface
CR3002	RS232C, any protocol, bus powered
CR3003	USB Interface, bus powered

*Default values

OPEN DRAWER COMMAND

CR3000	Pulse from Printer drive circuit
CR3001	
Printer	Pulse from Printer drive circuit
Dedicated RS232C	Any software transmitted data
Non-dedicated RS232C	User Programmable security code (1-255 hex, preset to 07 Hex)
Parallel	User Programmable security code (1-255 Hex, preset to 07 Hex)
CR3002	Any software transmitted data
CR3003	User Programmable security code (1 to 5 bytes)

NOTES

CR3000	Logic Controls supports all POS printers. Please specify POS printer type when ordering. Cable and keys supplied.
CR3001	Power adapter, serial interface cable (to computer) and keys supplied. For parallel connections user must supply cables.
CR3002	No power adapter required. Manual, keys, and serial interface cable supplied.
CR3003	No power adapter required.

CONNECTOR PINOUT INFORMATION CR3001

P1 (DB25M) - Parallel input from computer

1	-Strobe	10	-ACK
2	Data 0	11	Busy
3	Data 1	12	Paper End
4	Data 2	13	Select
5	Data 3	14	-Auto Feed
6	Data 4	15	-Error
7	Data 5	16	-Initialize Printer
8	Data 6	17	-Select Input
9	Data 7	18-25	Ground

P2 (DB25F) - Parallel output to printer

1	-Strobe	10	-ACK
2	Data 0	11	Busy
3	Data 1	12	Paper Feed
4	Data 2	13	Select
5	Data 3	14	-Auto Feed
6	Data 4	15	-Error
7	Data 5	16	-Initialize Printer
8	Data 6	17	-Select Input
9	Data 7	18, 21, 25	Printer detection
		19, 20, 21-24	Ground

P3 (DB25M) - Serial input from computer

2	Receive Data	8	Data Carrier Detect
3	Transmit Data	9	Open-drawer indicator
4	Request To Send	11	Open-drawer indicator
5	Clear To Send	18	POS printer interface
6	Data Set Ready	20	Data Terminal Ready
7	Ground	25	POS printer interface

P4 (DB9F) - Pass-thru serial port (input/output)

1	P5 pin 1	6	P5 pin 6
2	Transmit to peripheral	7	P5 pin 7
3	Receive from peripheral	8	P5 pin 8
4	P5 pin 4	9	P5 pin 9
5	Ground		

P5 (DB9M) - Pass-thru serial port (input/output)

Same connections as P4

P6 (DB9M) - Serial input from computer

1	DCD	5	Ground
2	Receive Data	6	DSR
3	Transmit Data	7	RTS
4	DTR	8	CTS


Pins 7 and 8 are tied together internally
Pins 1, 4, and 6 are tied together internally

BACK PANEL INFORMATION


CR3000



CR3001

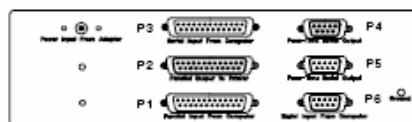

CR3002



CR3003



An Innovative Manufacturer Since 1982



www.logiccontrols.com
LOGIC CONTROLS, INC., NY, USA



ELECTRO-MECHANICS

SRP-350

THERMAL RECEIPT PRINTER

Affordable, heavy-duty industry standard thermal printer is compatible with PC or POS systems and cash drawers.



With speed, quality and value, the Samsung SRP-350 thermal receipt printer is clearly first in its class. It easily withstands the rigors of tough environments, printing receipts, coupons, logos or bar codes at 150mm (about 6 inches) per second. The user-friendly design incorporates a small footprint, drop-and-load paper insertion and a standard cable cover. The SRP-350 features the most current interfaces such as RS-232C, Parallel, RS-485, USB and Ethernet. The modular interfaces can be easily changed by only having to replace the interface board without opening the cabinet.

Samsung SRP-350 Thermal Receipt Printer



Features

- Fast 150mm/Second (47.2 Lps) Print Speed
- Compatible with Competitor's Emulations Including Epson, Star, Citizen
- Saves Installation Space (Compact Size, Wall Mount Option)
- Easy to Use
 - Drop and Print Paper Insertion
 - Simple to Eliminate Paper Jam
 - Compact Design
- Auto Cutter
- Near-End Sensor and Paper-End Sensor

Specifications

Print Method:	Direct Thermal Line
Lines/Second:	47.2 (150mm/Second)
Print Direction:	Bi-Directional Logic Seeking
Characters/Line:	Font A: 40 / 42 Font B: 33 / 35
Character Size:	Font A: 42 Font B: 56
MCBF:	37,000,000 Lines
TPH Line:	1/10 ⁸ Pulse, 100Km
Extended Graphic:	128 x 7 Page (1 Space Page)
Bar Code:	EAN-13, EAN-8, Code 39, 93, 128, ITF, Code Bar, UPC-A, UPC-E
Emulation:	Epson, Citizen, Star
Driver:	Windows 95, 98, 2000, XP, NT, OPOS, USB
Interface:	Serial, Parallel, RS-485, USB, Ethernet
Data Buffer:	4 kb
Power Supply:	AC 120 ~ 230 V + 10% Adapter Included
Power Consumption:	Standby: 28.8W; Operating: 55.2W
Operating Temperature:	40° ~ 114°F (4° ~ 42°C)
Operating Humidity:	10% ~ 90%
Dimensions:	5 ¹ / ₁₆ "W x 7 ⁹ / ₁₆ "L x 5 ⁷ / ₈ " H (145mm x 192mm x 150mm)
Weight:	4 lbs. (1.8 kg)

All product features are subject to change without notice.



Drop and Print Paper Insertion



Standard Cable Cover



Standard Power Switch Cover



Easy to Change Interface Modules